


TECHNICRETE Double Roman, Bold Double Roman & Tuscan Roof Tiles cost effectiveness with aesthetic appeal

ANTIQUE COLOUR

(CODE:)

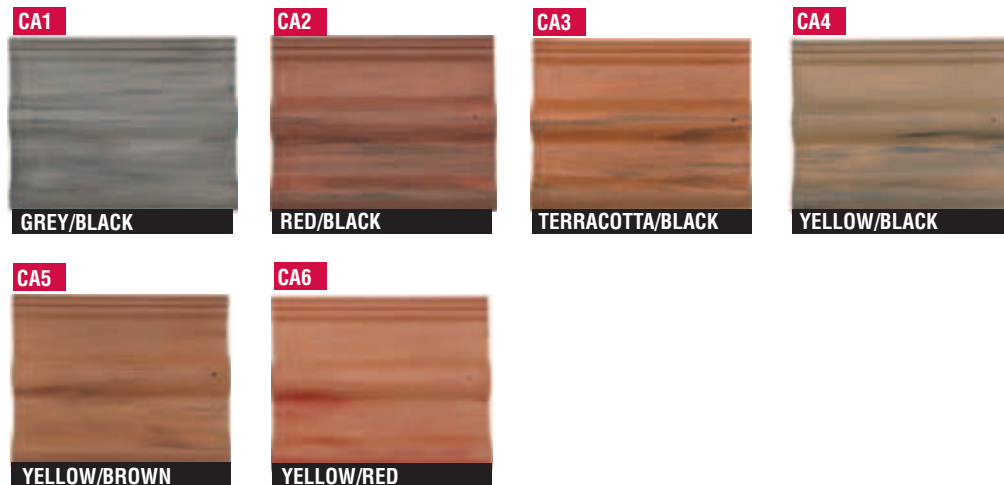

GRANULAR FINISHED

Granular finish only available in Polokwane

(CODE:)



SMOOTH COLOUR

(CODE:)



Tuscan Roof Tiles



Standard colours also available in Tuscan range and Bold Double Roman range

Colours shown may vary from the true colour due to the printing process.

Technicrete reserves the right to change or amend the contents of this document at anytime without any notice with this document intended for general information only. Any specific information required about product specifications, applications, technical information, sales conditions, warranties and guarantees as required for any design or installation should be obtained from Technicrete.

© 2014 Technicrete



Technicrete House

Cnr. Main Reef Road & Houtkapper Street, Roodepoort, 1725
Tel: 011 674 6900 – Fax: 011 672 1425
Email: info@technicrete.co.za
www.technicrete.co.za
0861 266267



A Murray & Roberts company

Branches:


White River: 013 758-1203
Polokwane: 015 298-8083
BCT Rustenburg: 014 538-0818

TECHNICRETE

Double Roman, Bold Double Roman & Tuscan Roof Tiles

Cost effectiveness with aesthetic appeal


Technicrete Double Roman, Bold Double Roman & Tuscan Roof Tiles, the high quality roof coverings to enhance any building construction. Available in an exciting range of colours and finishes.

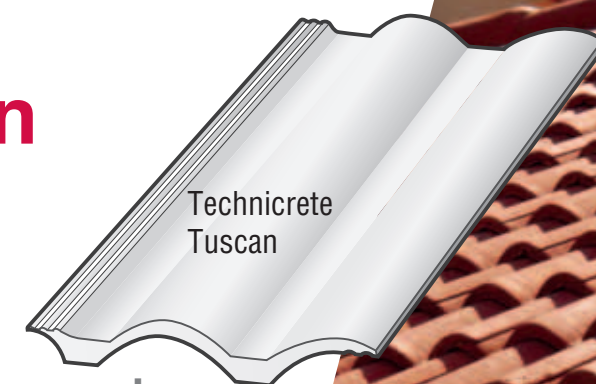

Technicrete
Tuscan



Technicrete
Bold Double
Roman

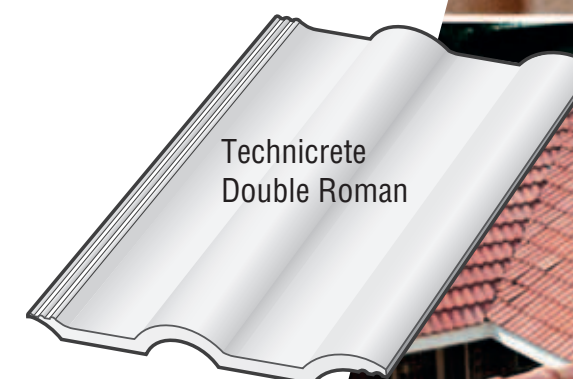

Technicrete
Double Roman










TECHNICRETE
quality support


CONCRETE ROOF TILES • EROSION PROTECTION BLOCKS • KERBS • MASONRY • PAVING • PRECAST PRODUCTS • RETAINING WALLS • SLOPE SUPPORT SYSTEMS



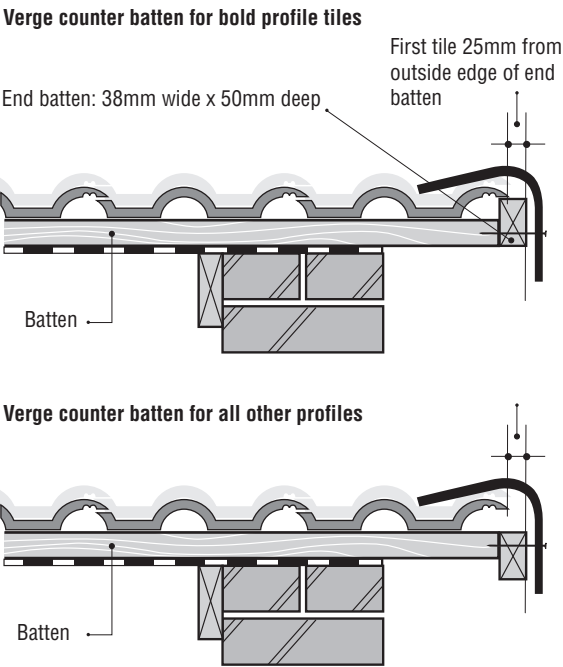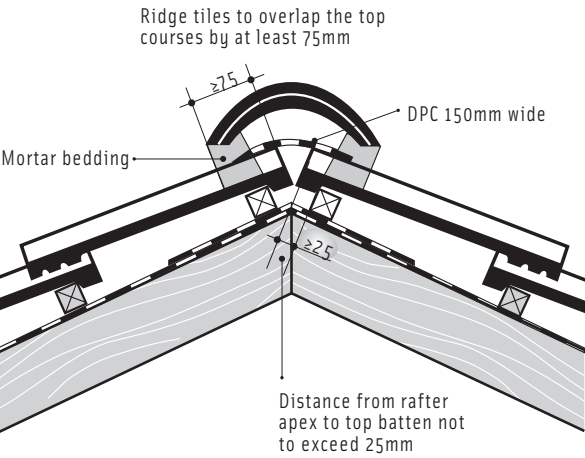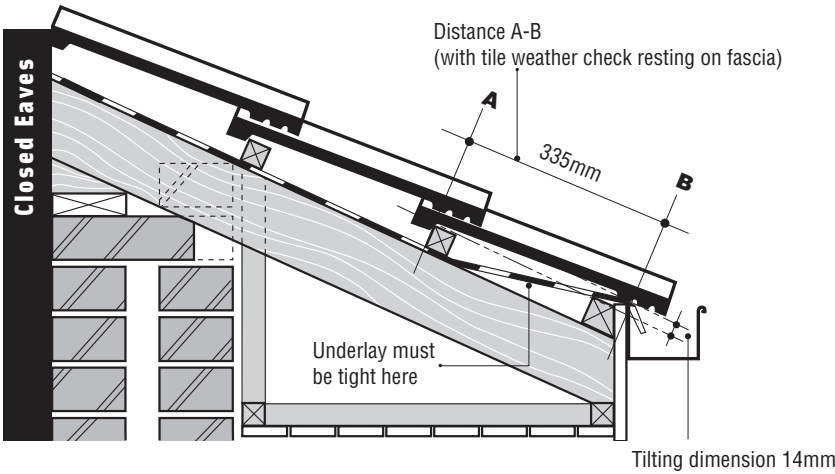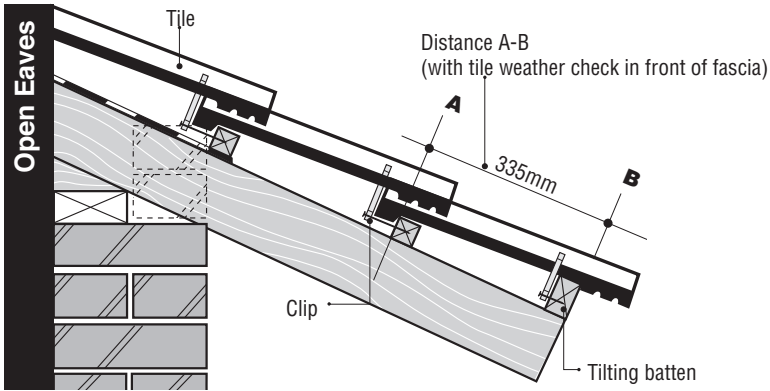


Nailing

The first two tiles at verges, eaves, hips, valleys and abutments must be nailed. It is recommended that every third tile in every third course be nailed, over 45° roof pitch and in exposed areas every tile should be nailed.

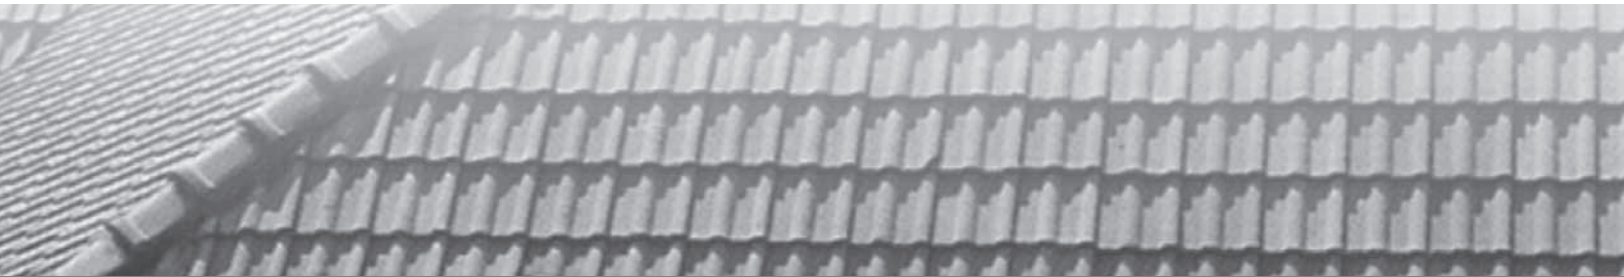

TILING DATA	Pitch	Pitch			
	17.5 to 25	26 & above			
Tile head lap (minimum)	100 mm	75 mm	Technicrete Double Roman 	Technicrete Bold Double Roman 	Technicrete Tuscan 
Batten centres (maximum)	320 mm	345 mm			
Length of battens per m² (average)	3.15 m	2.99 m			
Tiles per m² (average)	10.42	9.66			
Mass of tiles per m² (average)	50 kg	46 kg			
Size of tile	420 x 330 mm	420 x 330 mm			
Mass per tile (approx)	4.8 kg	4.8 kg			
Underlay	Mandatory	Recommended			



	Accessories	Weight	No. per meter	Note
	Tapered ridge tile	4.7 kg	2.5	
	Angle butt ridge tile	4.5 kg	3	
	Butt mono ridge	6.3 kg	3	
	Angle collar ridge	4.5 kg	3	
	Hip starter	3.9 kg	N/A	N/A